




NO. 00 DANMARK



VERSION 1

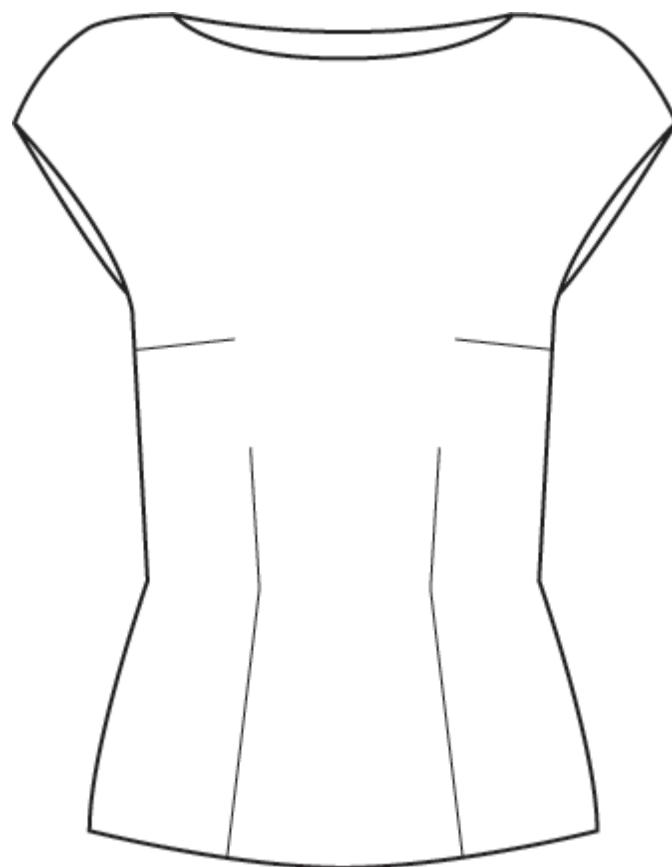





Cutting Fabric:

Each pattern piece is marked with a capital letter. On the cutting layout plan, you'll find the same capital letters so that you can easily see which pattern pieces to use for the view you've chosen.


VERSION 1 SIZE. EU 34-48 / UK 6-20 / US 12-16

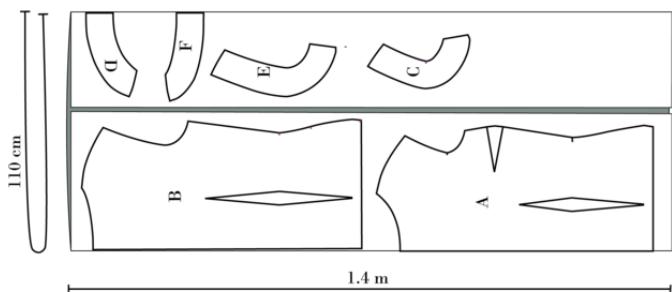


VERSION 1 SIZE. EU 34-40 / UK 6-12 / US 2-8

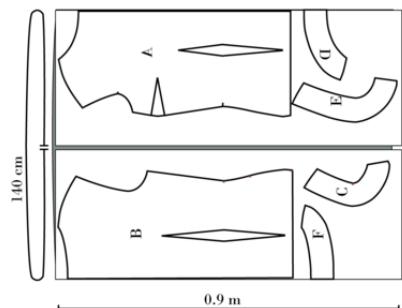

VERSION 1 SIZE. EU 42-48 / UK 14-20 / US 10-16

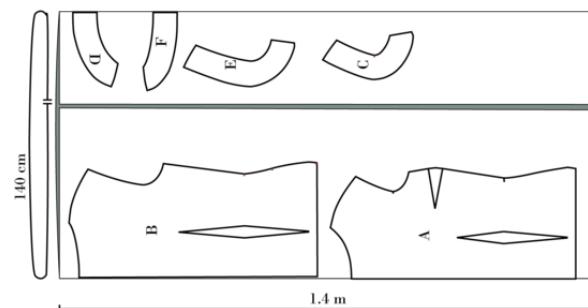

VERSION 1 SIZE. EU 34-48 / UK 6-20 / US 2-16





Sewing instructions

NB! The pattern has 1 cm seam allowances included,
unless otherwise noted.

1. Begin by cutting all your pieces according to the cutting layout plan.
2. Press interfacing to all facing pieces.

NB! For the best finish, sew before overlocking.


SEW THE FACINGS

3. Sew the facing shoulder seams, right sides together.
4. Sew the arm facings in pair. Sew side seams and shoulder seams, right sides together.
5. Press all seams open.

RIGHT SIDE


WRONG SIDE

INTERFACING

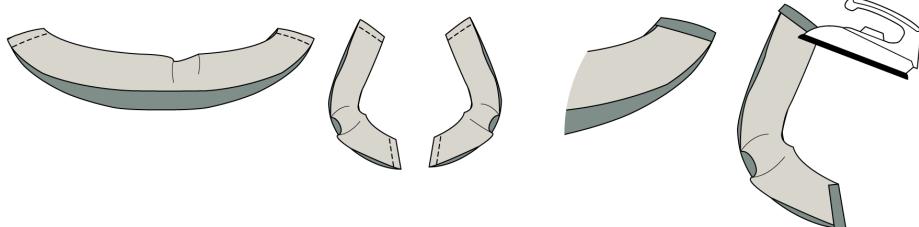

SEW THE BLOUSE

6. Sew the darts on the back piece according to the markings on the pattern piece. Press them towards centre-back.
7. Sew the darts on the front piece according to the markings on the pattern piece. Press the waist darts towards centre-back and the bust darts upwards.

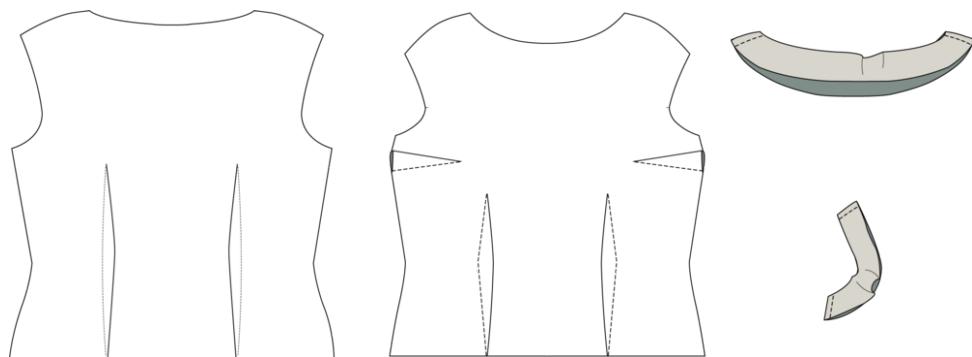



8. Finish the seam allowances of the neck facing and arm facing on the long edge.

9. Finish the seam allowances of the back and front side seam and shoulder seam.

NB! Overlock or zigzag the seam allowances of each piece separately.




JOIN ALL PIECES

10. Sew the front piece to the back pieces in both shoulder seams and side seams.

11. Press all seams open.

12. Place the neckline facing on the neckline, right sides together, and sew along the neckline.

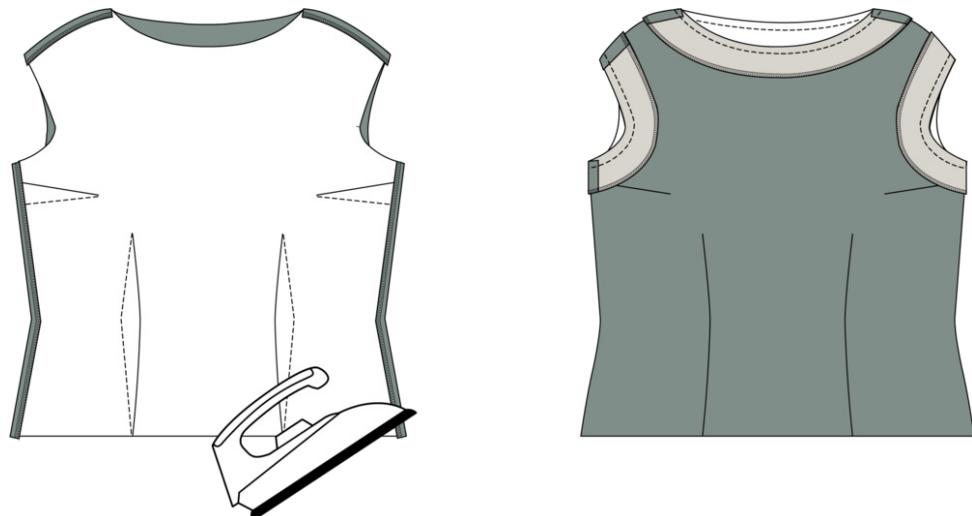



-
13. Place the left and right arm facing in the armscyes, right sides together, and sew along the armscyes.
 14. Understitch all facings to keep them in place.
 15. Clip notches to the seam allowances. Turn and press the facing in place.
 16. Stitch the facing to the seam allowance.
 17. Finish the seam allowances of the hem.
 18. Hem, using a 2 cm hem. If you like you can make an invisible hem by hand or a lace hem.

